

GREAT STARTING SOLUTION

FOR A COMPANY'S AUTOMATION JOURNEY
CARTON SEALING SOLUTION

OUR MOST **VERSATILE** SOLUTION

QUICK HIGHLIGHTS

SEALS UP TO 40 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Entry Level Automation Solution
- Manually Adjust Height and Width of Carton Sealer for Each Carton Size
- Operator Feeds and Fold Flaps of Cartons Into Carton Sealer
- Mounting of Electrical Box or Handles on Either Side


CARTON RANGE

Specifications based on MSD22-2

Length
(min.-max.)
(6.0"-U")

Width
(min.-max.)
(4.25"-20.0")

Height
(min.-max.)
(3.5"-20.5")



MSD **MANUAL SIDEDRIVE DUAL MAST**

The BestPack™ MSD Series is a Semi-Automatic Uniform Tape Carton Sealer and is our most popular operator-fed adjustable carton sealer. The MSD is a top of the line machine, designed to suit a variety of light-to-heavy duty uniform carton closure applications. Using side belt technology, the MSD will seal very narrow to wide cartons. Dual telescopic masts allow for an extra 4" carton height extension on the upper assembly.



FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION

WWW.BCPKG.COM

VERSION 5.0_1023



SIDEBELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



COMPLETE BED ROLLER SYSTEM

Increase throughput while reducing strain on the motor.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.



CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.

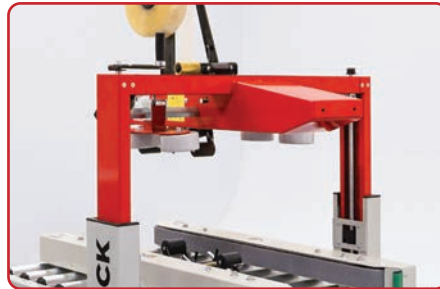

DUAL TELESCOPING MAST

Stronger design, capable of precise adjustments resulting in a clean, consistent seal.




TOP COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.


MACHINE FOOTPRINT

Specifications based on MSD22-2

TOP VIEW

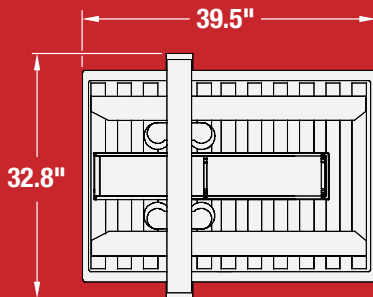

SIDE VIEW



Note: Dimensions are all subject to change without prior notification.

OPTIONS

- Available in Stainless Steel
- Additional Safety Options - Interlock Safety Gates
- 3 Flap Folder
- Low-Tape/No-Tape Monitoring
- Infeed/Exit Conveyors
- Heavy Duty Casters
- High-Speed Options (Up to 125 ft. per min.)

POPULAR MSD MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

| MODEL | MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT | CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.) | CONVEYOR HEIGHT HEIGHT (min. - max.) | CARTONS PER MIN.** | SHIPPING WEIGHT (LBS) | POWER REQUIREMENTS |
|-------------------------|-----------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------|-----------------------|--------------------------|-----------------------|
| MSD22-2 2" Tape Head | (39.5") x (32.8") x (70.3") | (6.0" - U) x (4.25" - 20.0") x (3.5" - 20.5") | (23.5" - 30.0") | Up to 40 | 342 | 110 Volts 60 Hz |
| MSD22-3 3" Tape Head | (39.5") x (32.8") x (70.3") | (6.0" - U) x (4.25" - 20.0") x (3.5" - 20.5") | (23.5" - 30.0") | Up to 40 | 342 | 110 Volts 60 Hz |
| MSD22-6 6" Tape Head | (39.5") x (32.8") x (70.3") | (6.0" - U) x (4.25" - 20.0") x (3.5" - 20.5") | (23.5" - 30.0") | Up to 40 | 425 | 110 Volts 60 Hz |
| MSD23-2 2" Tape Head | (39.5") x (32.8") x (80.3") | (6.0" - U) x (4.25" - 20.0") x (3.9" - 30.0") | (25.8" - 30") | Up to 40 | 390 | 110 Volts 60 Hz |

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY
U - UNLIMITED

ALL MODELS AVAILABLE IN HIGH SPEED & FOOD GRADE 304 STAINLESS STEEL



For more information please go to:
WWW.BCPKG.COM or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.