

# MANUAL QUAD BELT

*CARTON SEALING SOLUTION*

Perfect for  
**HEAVY-DUTY &  
UNSTABLE CARTONS**

## QUICK HIGHLIGHTS

**SEALS UP TO 50 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- 2 Top and 2 Side Belt Drive System for Heavy and Unstable Cartons
- Top Compression Rollers to Improve Carton Stability
- Mounting of Electrical Box on Either Side
- Capable of Interchanging Between 2" or 3" Tape Head


## CARTON RANGE

Specifications based on MQ22-2

Length  
(min.-max.)  
**(6.0"-U)**

Width  
(min.-max.)  
**(7.5"-21.0")**

Height  
(min.-max.)  
**(4.5"-20.5")**




**FREE PRODUCT SUPPORT:**  
**TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT**

## MQ MANUAL QUAD DRIVE

The BestPack™ MQ Series is designed to effectively fulfill heavy-duty and unstable sealing needs. Featuring a quad-belt drive, two on the side and two on the top, the MQ series will securely pull through unstable cartons and is powered by three 110V UL-approved electric motors. The mast allows for an extra 4" carton height extension on the upper assembly.


\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION  
[WWW.BCPKG.COM](http://WWW.BCPKG.COM)

VERSION 5.0\_0224

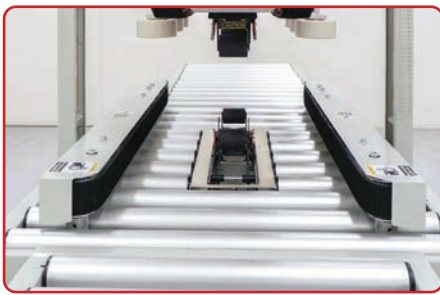

### 2 TOP AND 2 SIDE BELT DRIVES

Gently pulls product through while reducing less wear & tear on parts.

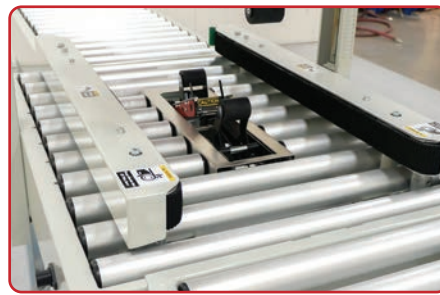

### COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.



### MANUAL HEIGHT & WIDTH ADJUSTMENT

Ability to adjustments height & width allowing accommodation of various box sizes.



### TOP COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.



### CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.




### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.


## MACHINE FOOTPRINT

Specifications based on MQ22-2

TOP VIEW

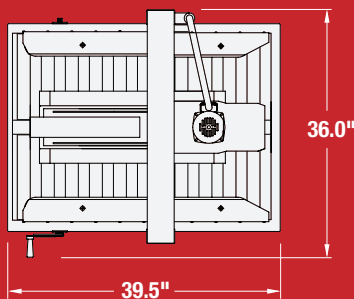

SIDE VIEW



Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- High-Speed Options  
(Up to 125 ft. per min.)
- Motorized Height Adjustment
- Infeed/Exit Conveyors w/  
L-Bracket Stabilizer
- Interlock Safety Gates
- Available in Stainless Steel
- Low Tape/No Tape Monitoring

## POPULAR MQ MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.**	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS
MQ22-2 or 22-3 2" or 3" Tape Head	(39.5") x (36.0") x (55.5")	(6.0" - U) x (7.5" - 21.0") x (4.5" - 20.5")	(20.5" - 30.0")	Up to 40	385	110 Volts 60 Hz
MQ22-2H** or 22-3H** 2" or 3" Tape Head	(39.5") x (36.0") x (55.5")	(6.0" - U) x (7.5" - 21.0") x (4.5" - 20.5")	(20.5" - 30.0")	Up to 50	385	110 Volts 60 Hz
MQ33-3 3" Tape Head	(39.5") x (43.0") x (81.0")	(6.0" - U) x (7.5" - 30.0") x (6.0" - 30.0")	(20.5" - 30.0")	Up to 25	542	110 Volts 60 Hz
MQ33-3H** 3" Tape Head	(39.5") x (43.0") x (81.0")	(6.0" - U) x (7.5" - 30.0") x (6.0" - 30.0")	(20.5" - 30.0")	Up to 32	542	110 Volts 60 Hz
MQ44-3 3" Tape Head	(39.5") x (53.0") x (91.0")	(6.0" - U) x (7.5" - 40.0") x (6.0" - 40.0")	(20.5" - 30.0")	Up to 25	600	110 Volts 60 Hz

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\*OUTSIDE DIMENSIONS ONLY | U - UNLIMITED | \*\*HIGH SPEED



For more information please go to:  
**WWW.BCPKG.COM** or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.