

# GREAT STARTING STAINLESS

*CARTON SEALING SOLUTION*

**OUR MOST VERSATILE**

**STAINLESS STEEL SOLUTION**

## QUICK HIGHLIGHTS

**SEALS UP TO 40 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Great for Food and Agriculture Industries
- Manually Adjust Height and Width of Carton Sealer for Each Carton Size
- Operator Feeds and Fold Flaps of Cartons Into Carton Sealer
- Mounting of Electrical Box on Either Side


## CARTON RANGE

Specifications based on MSD22-2S

Length  
(min.-max.)  
**(6.0"-U")**


Width  
(min.-max.)  
**(4.25"-20.0")**

Height  
(min.-max.)  
**(3.5"-20.5")**



## MSD-S MANUAL SIDEDRIVE STAINLESS STEEL

The BestPack™ MSD 304 Stainless Steel Series Semi-Automatic Uniform Tape Carton Sealer is our operator-fed and adjustable carton sealer designed to cater to the needs of light-to-heavy duty uniform carton closure applications where there are wet environments. Units are available for either splash resistant or wash-down applications.

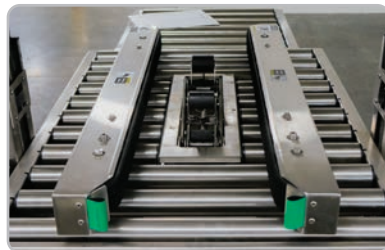

**FREE PRODUCT SUPPORT:**  
**TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT**

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION

[WWW.BCPKG.COM](http://WWW.BCPKG.COM)

VERSION 5.0\_0324



### SIDEBELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



### COMPLETE BED ROLLER SYSTEM

Increase throughput while reducing strain on the motor.



### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.



### CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.



### DUAL TELESCOPING MAST

Stronger design, capable of precise adjustments resulting in a clean, consistent seal.




### TOP COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.

## MACHINE FOOTPRINT

Specifications based on MSD22-2S

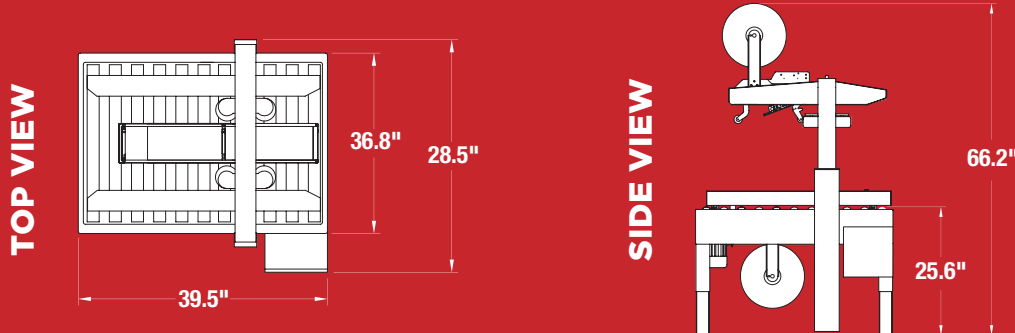

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- Additional Safety Options - Interlock Safety Gates
- 3 Flap Folder
- Low-Tape/No-Tape Monitoring
- Infeed/Exit Conveyors
- Heavy Duty Casters
- High-Speed Options (Up to 125 ft. per min.)
- Stainless Steel Option
  - IP52 (Wipe Down)
  - IP56 (Wash Down)

## POPULAR MSD-S MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.**	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS
MSD22-2S 2" Tape Head	(39.5") x (28.5") x (66.2")	(6.0" - U) x (4.25" - 20.0") x (3.5" - 20.5")	(23.5" - 30.0")	Up to 40	360	110 Volts 60 Hz
MSD22-3S 3" Tape Head	(39.5") x (28.5") x (66.2")	(6.0" - U) x (5.25" - 20.0") x (3.5" - 20.5")	(23.5" - 30.0")	Up to 40	360	110 Volts 60 Hz
MSD23-2S 2" Tape Head	(39.5") x (32.8") x (80.3")	(6.0" - U) x (4.25" - 20.0") x (3.9" - 30.0")	(25.8" - 30.0")	Up to 40	411	110 Volts 60 Hz
MSD32-2S 2" Tape Head	(39.5") x (43.8") x (70.3")	(6.0" - U) x (4.25" - 20.0") x (3.5" - 20.5")	(23.5" - 30.0")	Up to 25	432	110 Volts 60 Hz
MSD32-3S 3" Tape Head	(39.5") x (43.8") x (70.3")	(6.0" - U) x (5.25" - 20.0") x (3.5" - 20.5")	(23.5" - 30.0")	Up to 25	432	110 Volts 60 Hz

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\*OUTSIDE DIMENSIONS ONLY | U - UNLIMITED



For more information please go to:  
**WWW.BCPKG.COM** or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.