

# COST SAVING

*CARTON SEALING SOLUTION*

**PERFECT SOLUTION FOR  
GAPPED CARTONS**

## QUICK HIGHLIGHTS

**SEALS UP TO 40 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- 4 Tape Head Sealing System
- Side Belt Drive System
- Great Solution to Save on Corrugate Costs
- Mounting of Electrical Box on Either Side


## CARTON RANGE

Specifications based on MS2B2T23-2

Length  
(min.-max.)  
**(6.0"-U)**

Width  
(min.-max.)  
**(10.0"-21.5")**

Height  
(min.-max.)  
**(5.5"-30.0")**



# MS2B2T

## MANUAL SIDEDRIVE 2 BOTTOM & 2 TOP CARTON SEALER

The BestPack™ MS2B2T Series carton sealer is operator-fed and adjustable. It is designed to lay two strips of tape on the bottom and two strips of tape top of the carton. This becomes necessary where the major flaps do not meet in the middle of the carton, and the cost of staples is not acceptable. This series sealer eliminates all together the need for staples or glue on the bottom and the top of the carton. The sealer has four tape heads, with two side belts driven by two electric 110V UL approved motors.



**FREE PRODUCT SUPPORT:**  
**TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT**

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION


[WWW.BCPKG.COM](http://WWW.BCPKG.COM)

VERSION 4.0\_1223



### SIDE BELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.

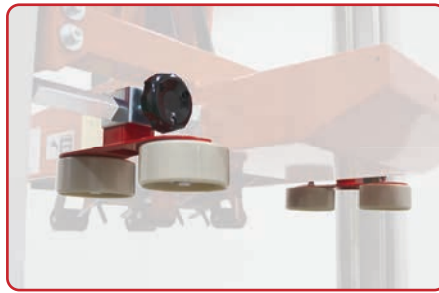


### UPPER SIDE COMPRESSION UNIT

Eliminates the carton's top gap for added product security.



### CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.

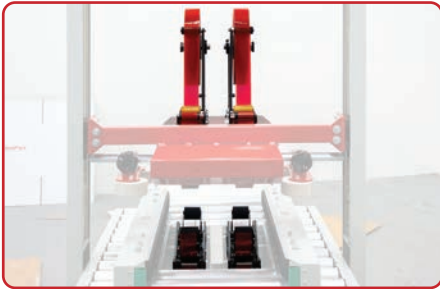


### 2 TOP & 2 BOTTOM TAPE HEADS

Eliminates the need for staples or glue on both carton ends. Ideal for cartons with major flaps not meeting in the middle.



### BESTPACK'S AC TAPE HEAD

Provides a clean and consistent seal, user friendly design.

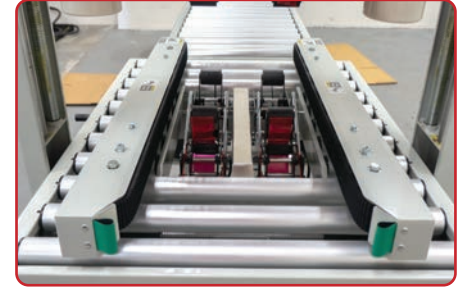


### COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.

## MACHINE FOOTPRINT

Specifications based on MS2B2T23-2

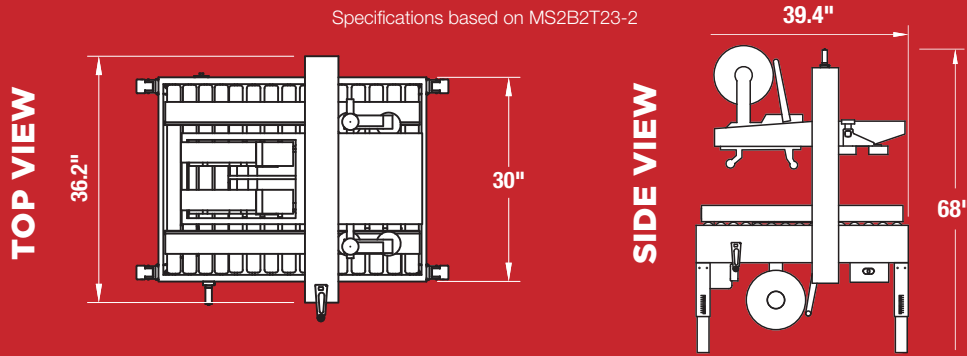

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- 3 Flap Folder
- Infeed/Exit Conveyor w/L-bracket stabilizer
- High Speed Motor Upgrade
- Interlock Safety Gates
- Heavy Duty Locking Casters

## POPULAR MS2B2T MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.**	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS
MS2B2T23-2 2" Tape Head	(39.4") x (36.2") x (68.0")	(6.0" - U) x (10.0" - 21.5) x (5.5" - 30.0")	(20.5" - 30.0")	Up to 40	435	110 Volts 60 Hz
MS2B2T23-3 3" Tape Head	(39.4") x (36.2") x (68.0")	(6.0" - U) x (10.0" - 21.5) x (5.5" - 30.0")	(20.5" - 30.0")	Up to 40	435	110 Volts 60 Hz

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.  
TOP GAP WIDTH RANGE (3.22"-6.5")  
BOTTOM GAP WIDTH RANGE (4.0"-6.0")

\*OUTSIDE DIMENSIONS ONLY  
\*\* BASED ON CUSTOMER APPLICATION  
ALL MODELS AVAILABLE IN HIGH SPEED & FOOD GRADE 304 STAINLESS STEEL



For more information please go to:  
**WWW.BCPKG.COM** or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.