

# OPERATOR-FED **SIDE** SEALER

*CARTON SEALING SOLUTION*

*SUPERIOR SOLUTION FOR  
EFFICIENTLY PACKING  
ITEMS FROM THE SIDE*

## QUICK HIGHLIGHTS

**SEALS UP TO 40 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Choose Your Desired Height for Tape Head to Seal
- Side Seals Large Heavy Cartons
- Capable of Interchanging Between 2" or 3" Tape Heads
- Ideal Solution for Sealing Partial and Full Overlap Cartons
- Tape Heads are Independent of Each Other


## CARTON RANGE

Specifications based on MTSS22-2

Length  
(min.-max.)  
**(6.0"-U")**

Width  
(min.-max.)  
**(7.5"-21.0")**

Height  
(min.-max.)  
**(4.5"-19.5")**



## MTSS MANUAL SIDE SEALING CARTON SEALER

The BestPack™ MTSS Series, an operator-fed carton sealer, is expertly designed for secure and adaptable side sealing, specifically addressing challenges associated with the product's weight, shape, and size requiring side filling operations. This solution proves especially effective for applications constrained by limited vertical space. Our MTSS line incorporates our exclusive 2" or 3" pop-out pressure-sensitive "High-Speed" tape heads with BestPack's patented tab adjustment.




**FREE PRODUCT SUPPORT:**  
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION

[WWW.BCPKG.COM](http://WWW.BCPKG.COM)

VERSION 5.0\_0124

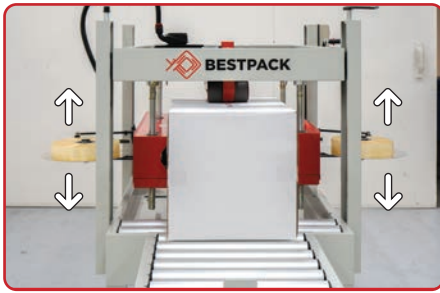

### INDEPENDENT SIDE TAPE HEADS

Independently set the height of tape heads, ideal for sealing both partial and full overlap cartons.



### FOUR BELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



### BESTPACK'S AC TAPE HEAD

Provides a clean and consistent seal, user friendly design.



### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.



### EMERGENCY START & STOP BUTTON

Instantly shuts off power during emergencies, offers easy access for operator to restart machine.




### CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.


## MACHINE FOOTPRINT

Specifications based on MTSS22-2

TOP VIEW



SIDE VIEW

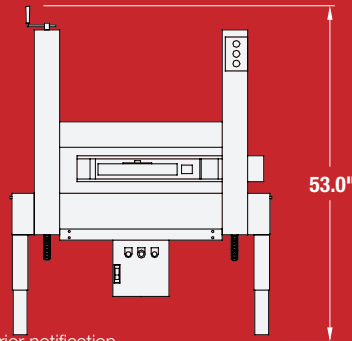

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- Available in Stainless Steel
- High-Speed Motor Upgrade (Up to 125 ft. per min)
- Infeed/Exit Conveyors w/L-Bracket Stabilizer
- Heavy Duty Locking Casters
- Low Tape/No Tape Monitoring

## POPULAR MTSS MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS
MTSS22-2/3 2" or 3" Tape Head	(45.5") x (33.6") x (53.0")	(6.0" - U) x (7.5" - 21.0") x (4.5" - 19.5")	(20.5" - 30.0")	Up to 40	548	110 Volts 60 Hz
MTSS33-2/3 2" or 3" Tape Head	(45.5") x (52.0") x (71.0")	(6.0" - U) x (14.3" - 31.0") x (8.5" - 30.0")	(23.5" - 30.0")	Up to 40	688	110 Volts 60 Hz

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

U - UNLIMITED  
\* OUTSIDE DIMENSIONS ONLY



For more information please go to:  
**WWW.BCPKG.COM** or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.