

# ENTRY LEVEL UNIFORM BOTTOM

*CARTON SEALING SOLUTION*



**MAXIMIZING  
EFFICIENCY**

*WITH BOTTOM CARTON SEALING*

## QUICK HIGHLIGHTS

**SEALS UP TO 40 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Eliminates Manual Bottom Sealing
- Increase Throughput from Manual Erected Boxes
- Side Belt Drive System
- Seals Uniform Sized Cartons
- User-Friendly Design Ensures Consistent Seals Everytime




## CARTON RANGE

Specifications based on MS20-2

Length  
(min.-max.)  
**(6.0"-U)**

Width  
(min.-max.)  
**(4.25"-20.0")**

Height  
(min.-max.)  
**(4.0"+)**



## MS MANUAL SIDEDRIVE BOTTOM ONLY SEALER

Optimize your packaging workflow using BestPack™ MS20 Series Bottom Sealer Tape Carton Sealer, which stands out as our most widely favored model. This operator-fed adjustable carton sealing machine is designed to accommodate light-to-heavy-duty uniform bottom carton closure requirements. Offering a user-friendly experience, this solution minimizes tape usage and labor expenses, presenting a cost-effective packaging solution.




**FREE PRODUCT SUPPORT:**  
**TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT**

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION

[WWW.BCPKG.COM](http://WWW.BCPKG.COM)

VERSION 4.0\_1223

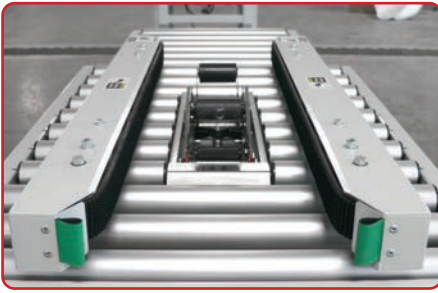

### SIDE BELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



### UPPER SIDE COMPRESSION UNIT

Eliminates the carton's top gap for added product security.



### CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.



### 2 TOP & 2 BOTTOM TAPE HEADS

Eliminates the need for staples or glue on both carton ends. Ideal for cartons with major flaps not meeting in the middle.



### BESTPACK'S AC TAPE HEAD

Provides a clean and consistent seal, user friendly design.




### COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.


## MACHINE FOOTPRINT

Specifications based on MS20-2

TOP VIEW

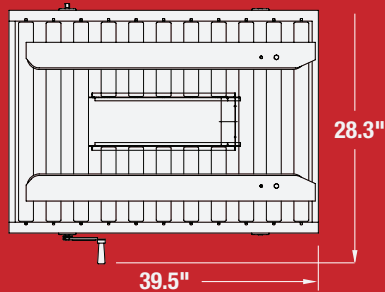

SIDE VIEW

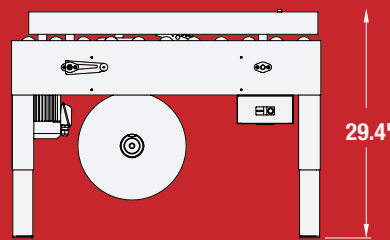

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- Available in Stainless Steel
- Infeed/Exit Conveyors w/L-Bracket Stabilizer
- High-Speed Options (Up to 125ft. per min.)

## POPULAR MS BOTTOM ONLY MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.**	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS
MS20-2 2" Tape Head	(39.5") x (28.3") x (29.4")	(6.0" - U) x (4.25" - 20.0")	(20.5" - 30.0")	Up to 40	263	110 Volts 60 Hz
MS20-3 3" Tape Head	(39.5") x (28.3") x (29.4")	(6.0" - U) x (5.25" - 20.0")	(20.5" - 30.0")	Up to 40	263	110 Volts 60 Hz
MS30-2 2" Tape Head	(39.5") x (28.3") x (29.4")	(6.0" - U) x (4.25" - 30.0")	(20.5" - 30.0")	Up to 40	310	110 Volts 60 Hz
MS30-3 3" Tape Head	(39.5") x (28.3") x (29.4")	(6.0" - U) x (5.25" - 30.0")	(20.5" - 30.0")	Up to 40	310	110 Volts 60 Hz

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\*OUTSIDE DIMENSIONS ONLY | U - UNLIMITED | \*\* BASED ON CUSTOMER APPLICATION



For more information please go to:  
**WWW.BCPKG.COM** or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.