


FULLY AUTOMATIC QUAD DRIVE SEALER

CARTON SEALING SOLUTIONS

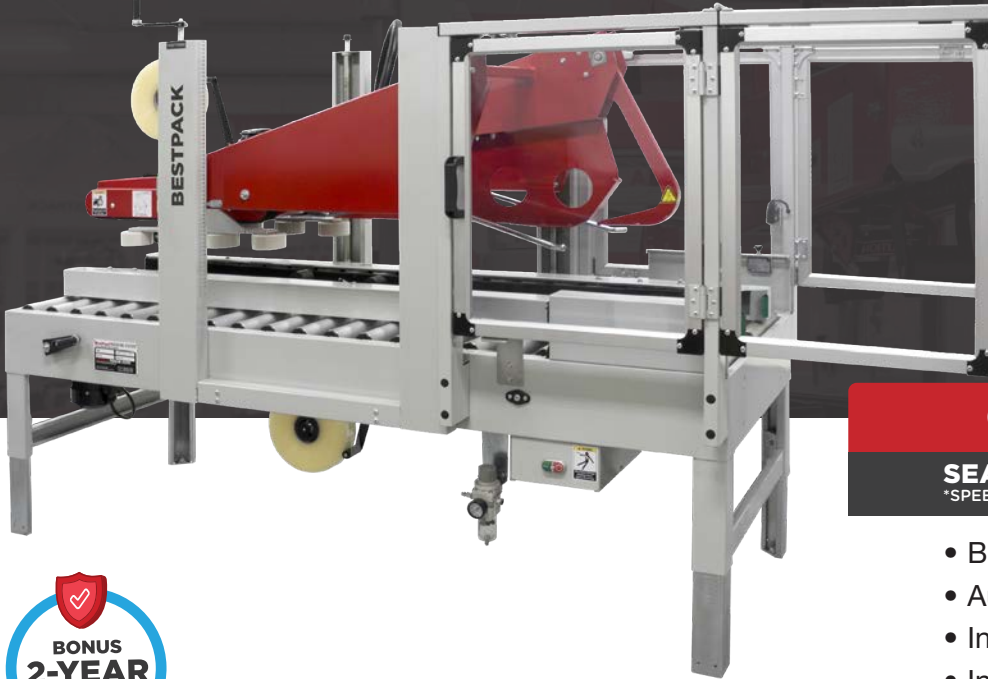

QUICK HIGHLIGHTS



SEALS UP TO 57 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- Built in Safety Gates
- Automatic Top Flap Folding
- Infeed and Outfeed Conveyor Control
- Includes our Data Advantage System
 - Realtime Monitoring Dashboard
 - Advanced Performance Analytics/Metrics
 - Increased Productivity and Reduced Downtime

CARTON RANGE

Specifications based on AQ22-2

Length (min.-max.)	Width (min.-max.)	Height (min.-max.)
(8.0"-27.5")	(7.0"-20.0")	(5.5"-20.0")

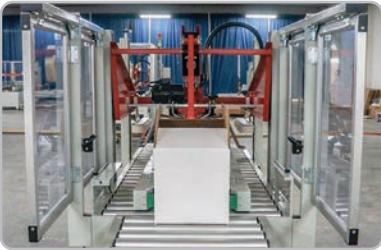

AQ FULLY AUTOMATIC QUAD DRIVE

The BestPack™ AQ Series is an fully automatic, carton sealer designed to meet the needs of uniform in-line carton closure applications. The four belt drives are powered by three electric 110V UL approved motors. The quad-belt technology allows for more carton stability and effective sealing in rugged applications. The AQ model, that closes all top flaps and seals the top & bottom of the carton, is dtesigned with a stable four-column support structure.



FREE PRODUCT SUPPORT:
 TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION
WWW.BCPKG.COM

VERSION 5.0_1123



TOP FLAP FOLDING KICKER & HORNS

Eliminates manual folding of top flaps, boosting throughput and efficiency.




QUAD BELTS

Providing you the stability you need for tall and unstable applications.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.

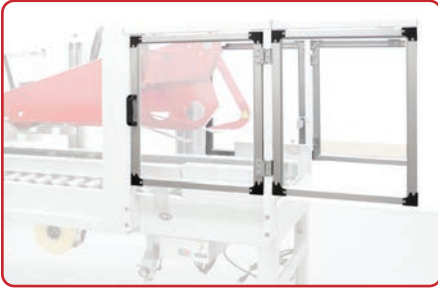

INTERLOCK SAFETY GATES

Providing safety and preventing workplace injury.

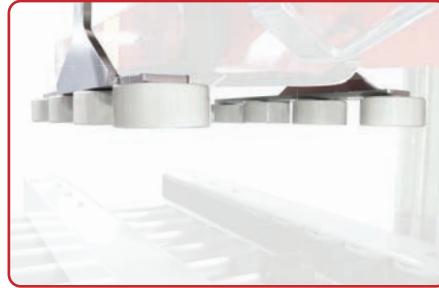

COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.





DAS (DATA ADVANTAGE SYSTEM)

An all-in one service that can help you identify areas of production loss, track machine usage history, monitor your machines in real time.

MACHINE FOOTPRINT

Specifications based on AQ22-2

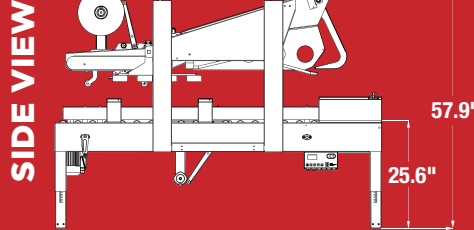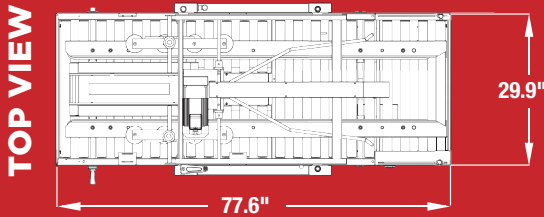

Note: Dimensions are all subject to change without prior notification.

OPTIONS

- High Speed Options
 - VFD Motor Upgrade (150ft per min.)
 - High Speed Motor Upgrade (125ft per min.)
- Available in Stainless Steel
- Additional Safety Options:
 - Sealing Area Gates
 - Bottom Skirt Guard
 - Exit Gates
 - Safety Gates
- Indexer Option

POPULAR AQ MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE*** LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	POWER REQUIREMENTS	AIR REQUIREMENTS	CARTONS PER MIN.****
AQ12-2 2" Tape Head	(70.2") x (26.5") x (68.0")*	(8.0" - 25.5") x (7.5" - 14.0") x (6.5" - 20.0")	110 Volts 60 Hz	45-60 PSI, 4-5 SCFM	Up to 34
AQ12-3H** 3" Tape Head	(70.2") x (26.5") x (68.0")*	(8.0" - 25.5") x (7.5" - 14.0") x (6.5" - 20.0")	110 Volts 60 Hz	45-60 PSI, 4-5 SCFM	Up to 57
AQ22-2 2" Tape Head	(77.5") x (29.9") x (57.9")*	(8.0" - 27.5") x (7.5" - 20.0") x (5.5" - 20.0")	110 Volts 60 Hz	45-60 PSI, 4-5 SCFM	Up to 34
AQ22-3H** 3" Tape Head	(77.5") x (29.9") x (57.9")*	(8.0" - 27.5") x (7.5" - 20.0") x (5.5" - 20.0")	110 Volts 60 Hz	45-60 PSI, 4-5 SCFM	Up to 57

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

* SAFETY GATES ARE AN ADDITIONAL 20" LONG | ** HIGH SPEED | *** OUTSIDE DIMENSIONS ONLY | ****BASED ON CUSTOMER APPLICATION



For more information please go to:
WWW.BCPKG.COM or call us at **718-628-8000**