



BESTPACK




B&C INDUSTRIES

FASTEST

FULLY AUTOMATIC UNIFORM

CARTON SEALING SOLUTIONS

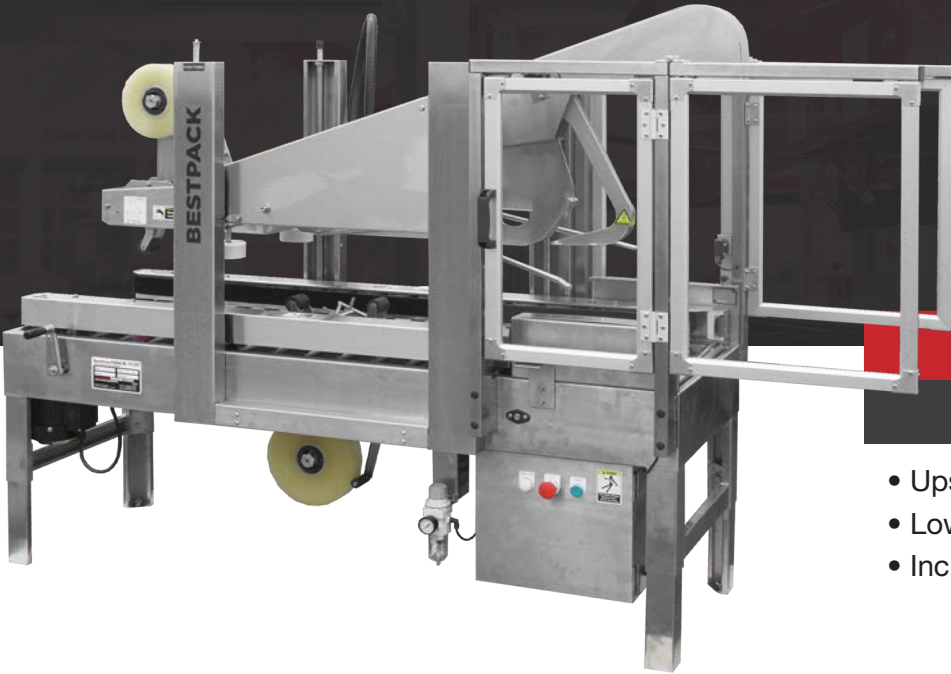

UNLOCK THE POWER OF DATA
REAL-TIME DATA FROM ANYWHERE

QUICK HIGHLIGHTS

SEALS UP TO 57 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS


- Upstream and Downstream Conveyor Control
- Low Tape/ No Tape Monitoring
- Includes our Data Advantage System
 - Realtime Monitoring Dashboard
 - Advanced Performance Analytics/Metrics
 - Increased Productivity and Reduced Downtime

BONUS 2-YEAR WARRANTY
AS A BPA MEMBER

CARTON RANGE

Specifications based on AS22-2S

Length (min.-max.) (8.0"-27.5")	Width (min.-max.) (6.0"-20.0")	Height (min.-max.) (5.5"-20.0")
--	---	--



AS-S STAINLESS AUTOMATIC UNIFORM SIDEDRIVE


The BestPack™ AS-Stainless Steel Series is an operator-free carton sealer designed to meet the needs of uniform in-line carton closure applications in wet environments. Designed with solid four column support structure and using dual motor side belt technology, the AS-S closes all four top flaps and seals the top & bottom of the carton, using 45-60 PSI and 4-5 SCFM of air. Ideal solutions for the food and agriculture industries.



FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION
WWW.BCPGK.COM

VERSION 5.0_0324

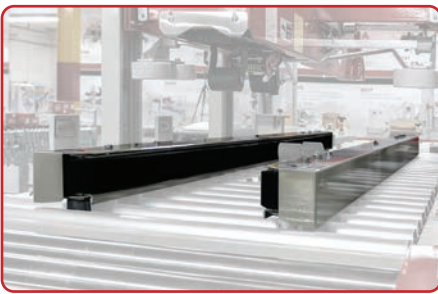

SIDEBELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



DATA ADVANTAGE SYSTEM

Provides real time data to help deal with costly avoidable issues and improve production efficiency.



ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on this solution.



TOP COMPRESSION ROLLERS

Eliminates the carton's top gap for added product security.



TAPE MONITORING SYSTEM

Low tape, no tape and no cut monitoring system, notifies the user of potential downtime.




COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.

MACHINE FOOTPRINT

Specifications based on AS22-2S

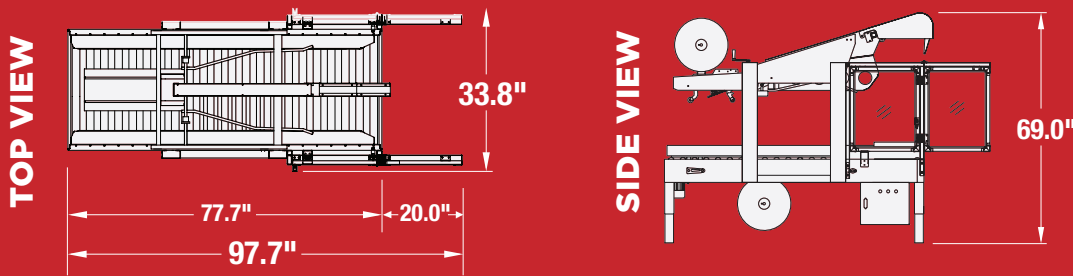

Note: Dimensions are all subject to change without prior notification.

OPTIONS

- High Speed Options
 - VFD Motor Upgrade (150ft per min.)
- Additional Safety Options:
 - Sealing Area Gates
 - Bottom Skirt Guard
 - Exit Gates
 - Safety Gates
- Indexer Option
- Stainless Steel Option
 - IP52 (Wipe Down)
 - IP56 (Wash Down)

POPULAR AS-S MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE*** LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	POWER REQUIREMENTS	AIR REQUIREMENTS	CARTONS PER MIN. ****
AS12-2S 2" Tape Head	(70.2") x (26.5") x (68.0")*	(8.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	110 Volts 60 Hz	40-60 PSI, 4-5 SCFM	Up to 57
AS12-3S 3" Tape Head	(70.2") x (26.5") x (68.0")*	(8.0" - 25.5") x (6.0" - 14.0") x (6.5" - 20.0")	110 Volts 60 Hz	40-60 PSI, 4-5 SCFM	Up to 34
AS22-2S 2" Tape Head	(77.7") x (33.8") x (69.0")*	(8.0" - 27.5") x (6.0" - 20.0") x (5.5" - 20.0")	110 Volts 60 Hz	40-60 PSI, 4-5 SCFM	Up to 57
AS22-3S 3" Tape Head	(77.7") x (33.8") x (69.0")*	(8.0" - 27.5") x (6.0" - 20.0") x (5.5" - 20.0")	110 Volts 60 Hz	40-60 PSI, 4-5 SCFM	Up to 34

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

* SAFETY GATES ARE AN ADDITIONAL 20" LONG | ** HIGH SPEED | *** OUTSIDE DIMENSIONS ONLY | **** BASED ON CUSTOMER APPLICATION



For more information please go to:
WWW.BCPKG.COM or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.