

# RANDOM LOW PROFILE

## CARTON SEALING SOLUTION



**SEALS  
CARTONS**

**AS LOW AS 2.5" IN HEIGHT**

### QUICK HIGHLIGHTS

**SEALS UP TO 12 CARTONS PER/MIN.\***

\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- “Soft Touch” Pneumatic System is Gentle on Cartons
- Low Profile Top & Bottom Seal
- Dual Telescoping Masts
- Seals Random Size Cartons Without Stopping for Adjusting
- Maintenance Free Air Cylinders


### CARTON RANGE

Specifications based on RSL22-2

Length  
(min.-max.)  
**(6.0"-U")**

Width  
(min.-max.)  
**(5.7"-21.0")**

Height  
(min.-max.)  
**(2.5"-20.5")**



## RSL RANDOM SIDEDRIVE LOW PROFILE CARTON SEALER

The BestPack™ RSL Series is a Semi-Automatic Random Tape Carton Sealers designed to seal very low profile cartons in addition to the wide range expected of a random carton sealer. Build for speed and durability, the RSL's low profile feature allows for the effective sealing of cartons at a minimum height of 2.5". The RSL is capable of sealing cartons up to 20.5" tall as well.



**FREE PRODUCT SUPPORT:**  
**TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT**

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION  
[WWW.BESTPACK.COM](http://WWW.BESTPACK.COM)

VERSION 5.0\_0224



### "SOFT TOUCH" PNEUMATIC SYSTEM

Air powered belt drive and sealing section decreases product damage while maintaining presentation.



### SIDE BELT DRIVE SYSTEM

Gently pulls product through while reducing less wear & tear on parts.



### COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.



### INFEED AND EXIT LIMIT SWITCHES

Starts and resets upon activation, decreases energy consumption and risk of injury.



### OFFSET TAPE HEADS

Enables precise and efficient sealing of low-profile cartons, individually sealing top and bottom of carton.




### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.

## MACHINE FOOTPRINT

Specifications based on RSL22-2

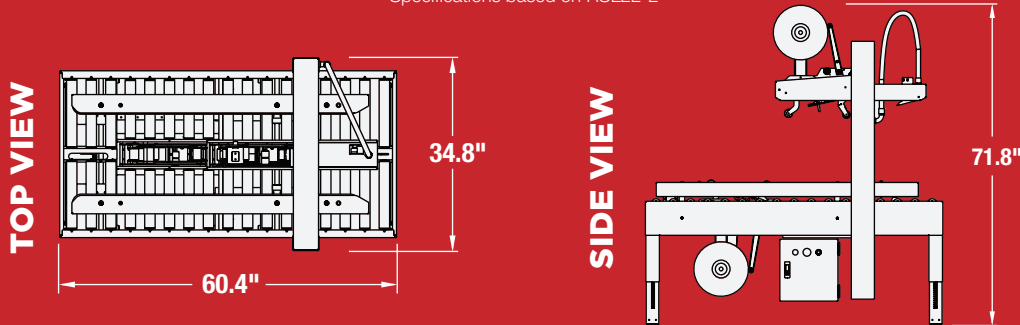

Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- High-Speed Motor Upgrade (Up to 125 ft. per min)
- Heavy Duty Locking Casters
- Infeed/Exit Conveyors w/L-Bracket Stabilizer
- Interlock Safety Gates
- Available in Stainless Steel

## POPULAR RSL MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
RSL22-2 2" Tape Head	(60.4") x (34.8") x (71.8")	(6.0" - U) x (5.7" - 21.0") x (2.5" - 20.5")	(20.5" - 30.0")	Up to 12	450	110 Volts 60 Hz	55-60 PSI, 5 SCFM
RSL22-3 3" Tape Head	(60.4") x (34.8") x (71.8")	(6.0" - U) x (5.7" - 21.0") x (2.5" - 20.5")	(20.5" - 30.0")	Up to 12	450	110 Volts 60 Hz	55-60 PSI, 5 SCFM

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\*OUTSIDE DIMENSIONS ONLY  
U - UNLIMITED

ALL MODELS AVAILABLE IN HIGH SPEED & FOOD GRADE 304 STAINLESS STEEL



For more information please go to:  
**WWW.BCPKG.COM** or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.