

# RANDOM QUAD DRIVE

CARTON SEALING SOLUTION



**PERFECT FOR:**  
**HEAVY DUTY &  
UNSTABLE CARTONS**

## QUICK HIGHLIGHTS

**SEALS UP TO 15 CARTONS PER/MIN.\***  
\*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- 2 Top and 2 Side Belt Drive System for Heavy and Unstable Cartons
- Increased Throughput of Heavy and Tall Unstable Cartons
- Mounting of Electrical Box on Either Side
- BestPack's Innovative "Soft Touch" Pneumatic System is Gentle on Cartons




## CARTON RANGE

Specifications based on RQ22-2

Length  
(min.-max.)  
**(7.0"-U)**

Width  
(min.-max.)  
**(7.5"-21.0")**

Height  
(min.-max.)  
**(4.5"-20.0")**



## RQ RANDOM QUAD DRIVE

The BestPack™ RQ Series is a Semi-Automatic Random Tape Carton Sealer built for speed and rugged dependability. With a quad-belt drive, the RQ is a heavy-duty work horse that effectively seals unstable cartons, including cartons that are taller than they are long, overfilled, very heavy, or otherwise difficult to seal.



**FREE PRODUCT SUPPORT:**  
**TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT**

\*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION  
[WWW.BESTPACK.COM](http://WWW.BESTPACK.COM)

VERSION 5.0\_0324



### “SOFT TOUCH” PNEUMATIC SYSTEM

Air powered belt drive and sealing section decreases product damage while maintaining presentation.



### 2 TOP AND 2 SIDE BELT DRIVES

Gently pulls product through while reducing less wear & tear on parts.




### ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.



### COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.

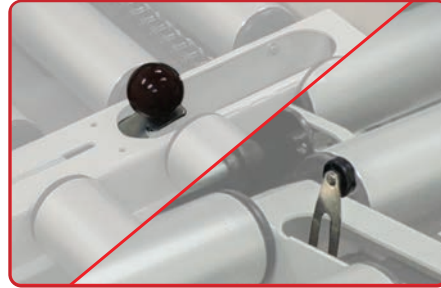

### INFEED AND EXIT LIMIT SWITCHES

Starts and resets upon activation, decreases energy consumption and risk of injury.




### CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.


## MACHINE FOOTPRINT

Specifications based on RQ22-2

TOP VIEW



SIDE VIEW



Note: Dimensions are all subject to change without prior notification.

## OPTIONS

- High-Speed Options (Up to 125 ft. per min.)
- Infeed/Exit Conveyors w/L-Bracket Stabilizer
- Interlock Safety Gates
- Available in Stainless Steel
- Heavy Duty Casters

## POPULAR RQ MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
RQ22-2 2" Tape Head	(42.8") x (34.6") x (57.5")	(7.0" - U) x (7.5" - 21.0") x (4.5" - 20.0")	(20.5" - 30.0")	Up to 15	535	110 Volts 60 Hz	90-100 PSI, 6-8 SCFM
RQ22-3 3" Tape Head	(42.8") x (34.6") x (57.5")	(7.0" - U) x (7.5" - 21.0") x (4.5" - 20.0")	(20.5" - 30.0")	Up to 15	535	110 Volts 60 Hz	90-100 PSI, 6-8 SCFM
RQ23-2 2" Tape Head	(42.8") x (34.6") x (76.0")	(7.0" - U) x (7.5" - 21.0") x (4.5" - 30.0")	(20.5" - 30.0")	Up to 13	575	110 Volts 60 Hz	90-100 PSI, 6-8 SCFM
RQ44-3** 3" Tape Head	(42.8") x (54.7") x (86.0")	(7.0" - U) x (7.5" - 40.0") x (6.0" - 40.0")	(24.5" - 30.0")	Up to 12	735	110 Volts 60 Hz	90-100 PSI, 6-8 SCFM

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

\*OUTSIDE DIMENSIONS ONLY  
U - UNLIMITED  
\*\*HIGH SPEED



For more information please go to:  
**WWW.BCPKG.COM** or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.