

RANDOM QUAD DRIVE

CARTON SEALING SOLUTION



PERFECT FOR:
**HEAVY DUTY &
UNSTABLE CARTONS**

QUICK HIGHLIGHTS

SEALS UP TO 15 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- 2 Top and 2 Side Belt Drive System for Heavy and Unstable Cartons
- Increased Throughput of Heavy and Tall Unstable Cartons
- Mounting of Electrical Box on Either Side
- BestPack's Innovative "Soft Touch" Pneumatic System is Gentle on Cartons




CARTON RANGE

Specifications based on RQ22-2

Length
(min.-max.)
(7.0"-U)

Width
(min.-max.)
(7.5"-21.0")

Height
(min.-max.)
(4.5"-20.0")



RQ RANDOM QUAD DRIVE

The BestPack™ RQ Series is a Semi-Automatic Random Tape Carton Sealer built for speed and rugged dependability. With a quad-belt drive, the RQ is a heavy-duty work horse that effectively seals unstable cartons, including cartons that are taller than they are long, overfilled, very heavy, or otherwise difficult to seal.



FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION
WWW.BESTPACK.COM

VERSION 5.0_0324



“SOFT TOUCH” PNEUMATIC SYSTEM

Air powered belt drive and sealing section decreases product damage while maintaining presentation.



2 TOP AND 2 SIDE BELT DRIVES

Gently pulls product through while reducing less wear & tear on parts.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.



COMPLETE BED ROLLER SYSTEM

Increase through put while reducing strain on the motor.

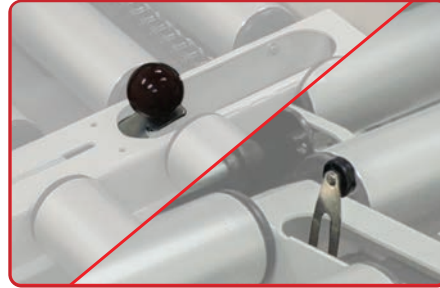

INFEED AND EXIT LIMIT SWITCHES

Starts and resets upon activation, decreases energy consumption and risk of injury.




CNC CUT AND WELDED FRAME/LEGS

4x longer lasting than bolted frames.


MACHINE FOOTPRINT

Specifications based on RQ22-2

TOP VIEW



SIDE VIEW



Note: Dimensions are all subject to change without prior notification.

OPTIONS

- High-Speed Options (Up to 125 ft. per min.)
- Infeed/Exit Conveyors w/L-Bracket Stabilizer
- Interlock Safety Gates
- Available in Stainless Steel
- Heavy Duty Casters

POPULAR RQ MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	CONVEYOR HEIGHT HEIGHT (min. - max.)	CARTONS PER MIN.	SHIPPING WEIGHT (LBS)	POWER REQUIREMENTS	AIR REQUIREMENTS
RQ22-2 2" Tape Head	(42.8") x (34.6") x (57.5")	(7.0" - U) x (7.5" - 21.0") x (4.5" - 20.0")	(20.5" - 30.0")	Up to 15	535	110 Volts 60 Hz	90-100 PSI, 6-8 SCFM
RQ22-3 3" Tape Head	(42.8") x (34.6") x (57.5")	(7.0" - U) x (7.5" - 21.0") x (4.5" - 20.0")	(20.5" - 30.0")	Up to 15	535	110 Volts 60 Hz	90-100 PSI, 6-8 SCFM
RQ23-2 2" Tape Head	(42.8") x (34.6") x (76.0")	(7.0" - U) x (7.5" - 21.0") x (4.5" - 30.0")	(20.5" - 30.0")	Up to 13	575	110 Volts 60 Hz	90-100 PSI, 6-8 SCFM
RQ44-3** 3" Tape Head	(42.8") x (54.7") x (86.0")	(7.0" - U) x (7.5" - 40.0") x (6.0" - 40.0")	(24.5" - 30.0")	Up to 12	735	110 Volts 60 Hz	90-100 PSI, 6-8 SCFM

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

*OUTSIDE DIMENSIONS ONLY
U - UNLIMITED
**HIGH SPEED



For more information please go to:
WWW.BCPKG.COM or call us at **718-628-8000**

© 2025 BestPack Packaging Systems. All rights reserved. This document is BestPack Public Information.