



BESTPACK



B&C INDUSTRIES

OUR MOST INNOVATIVE FULLY AUTOMATIC RANDOM CARTON SEALING SOLUTIONS



Equipped with:

4 SERVO MOTORS

for Speed, Durability,
& Reliability in Mind

QUICK HIGHLIGHTS

SEALS UP TO 30 CARTONS PER/MIN.*
*SPEED DEPENDENT ON CARTON SIZE AND MACHINE OPTIONS

- BestPack's Innovative "Soft Touch" Pneumatic System is Gentle on Cartons
- Equipped with Allen-Bradley Servos, PLC, HMI and VFD
- Carton Bypass Feature (Bypass Folding & Top Sealing)
- Low Tape/No Tape Monitoring System




CARTON RANGE

Specifications based on CSS22-2

Length
(min.-max.)
(10.0"-25.5")

Width
(min.-max.)
(7.0"-20.0")

Height
(min.-max.)
(4.0"-20.0")



CSS FULLY AUTOMATIC RANDOM SERVO CARTON SEALER

The BestPack™ CSS Series is a Fully Automatic Random Carton Sealer featuring our servo driven technology, which allows for fast height adjustment, quick width adjustment and smooth sealing operations. Our **complimentary level 1** tech support uses the VPN module in the CSS, to enable our technicians to detect real-time machine issues for timely assistance and optimal performance.



FREE PRODUCT SUPPORT:
TRAINING VIDEOS | ONLINE MANUALS | TECH SUPPORT

*CONTACT YOUR LOCAL BESTPACK REPRESENTATIVE FOR MORE INFORMATION
WWW.BCPGK.COM

VERSION 5.0_1123



RANDOM SIDEBELT DRIVE

Gently pulls product through while reducing less wear & tear on parts.




3 INDEPENDENT STATIONS

Increased throughput speed by indexing, flap folding, and sealing multiple cartons in one seamless operation.



HMI (HUMAN MACHINE INTERFACE)

Operator control panel that provides reliable data and troubleshooting at your fingertips.

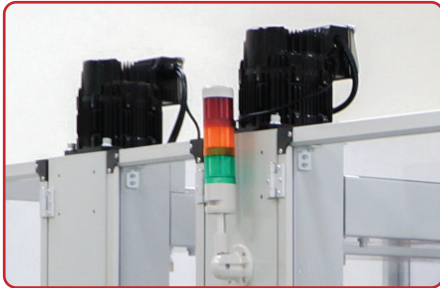

4 SERVO MOTORS

3x faster compared to a non-servo machine, precise control for each sealing stage.



EWON VPN WIFI MODULE

Allows for easy diagnosis for your machine saving you on costly maintenance visits and downtime.




ACCESSIBLE TECHNICAL SUPPORT

Convenient technical support is readily available via a QR code on solution.


MACHINE FOOTPRINT

Specifications based on CSS22-2

TOP VIEW

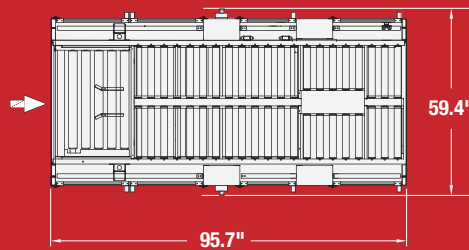

SIDE VIEW

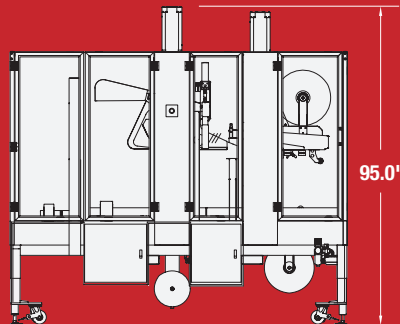

Note: Dimensions are all subject to change without prior notification.

OPTIONS

- Available in Stainless Steel
- Bypass Capabilities
- Additional Safety Options
 - Entry/Exit Gates
 - Safety Relay

POPULAR CSS MODELS

PLEASE REFER TO COMPARISON CHART FOR COMPLETE LIST OF MODELS.

MODEL	MACHINE DIMENSIONS LENGTH x WIDTH x HEIGHT	CARTON RANGE* LENGTH (min. - max.) x WIDTH (min. - max.) x HEIGHT (min. - max.)	POWER REQUIREMENTS	AIR REQUIREMENTS	CARTONS PER MIN.
CSS222-2H 2" Tape Head	(95.7") x (59.4") x (95"~100")	(10.0" - 25.5") x (7.0" - 20.0") x (4.0" - 20.0")	480 Volts 3 Phase	80 PSI, 5 SCFM	Up to 30
CSS222-3H 3" Tape Head	(95.7") x (59.4") x (95"~100")	(10.0" - 25.5") x (7.0" - 20.0") x (4.0" - 20.0")	480 Volts 3 Phase	80 PSI, 5 SCFM	Up to 30
CSS333-2H 2" Tape Head	(123.7") x (71.7") x (105"~110")	(8.0" - 38.0") x (4.0" - 30.0") x (4.0" - 30.0")	480 Volts 3 Phase 35 AMPS	85 PSI, 3.5 SCFM	Up to 13
CSS333-3H 3" Tape Head	(123.7") x (71.7") x (105"~110")	(8.0" - 38.0") x (4.0" - 30.0") x (4.0" - 30.0")	480 Volts 3 Phase 35 AMPS	85 PSI, 3.5 SCFM	Up to 13

INFORMATION SUBJECT TO CHANGE WITHOUT NOTICE.

ALL MODELS AVAILABLE IN FOOD GRADE 304 STAINLESS STEEL
* WIDTH IS LIMITED TO 11" WHEN HEIGHT IS BELOW 6"



For more information please go to:
WWW.BCPKG.COM or call us at **718-628-8000**